

Hospital Push/Pull Latches



Innovation, Quality,
Customer Service...

6400 & 6500 – Privacy Cylindrical Latches


Standard Features

- Designed for patient bathroom applications with the privacy-actuated thumb turn on one side and the override knob on the opposite side in case of emergency
 - **6400 Series**
Locking thumb turn on pull side
Override knob on push side
 - **6500 Series**
Locking thumb turn on push side
Override knob on pull side
- Cylindrical latch application – privacy function
- Door is locked by moving the thumb turn into the locked position
- Door is unlocked by operating handle on thumb turn side, moving thumb turn into the unlocked position or rotating the override knob in case of emergency
- 1-3/4" standard door thickness
- Meets ADA requirements
- Trim is mounted using four thru-bolts for maximum stability
- One continuous spring provides a smoother operation and extended life for the unit
- Non-handed for installation and stocking ease
- UL Listed in U.S.A and Canada for use on door fire rated 90 minutes or less, up to 4'0" x 8'0"
- 1/2" Latch Bolt Throw
- Patent# 6,293,598 & #6,196,599



Override Knob

Locking Thumb Turn

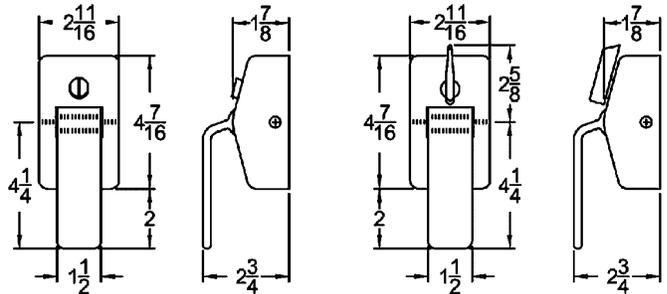

How to Order:

Model: _____

- 64 = 6400 Series
- 65 = 6500 Series

Latch Backset: _____

- 2 = 2-3/4" • 5 = 5"
- 3 = 3-3/4" • 7 = 7"

Strike: _____

- T = 2-3/4" T-Strike
- A = 4-7/8" ASA Strike

Finish: _____

- US32D • US32 • US10B • US3
- US26D • US26 • US10 • US4

Options, if Needed: _____

- H • AM • L • EX • X • SEC • THICK • P

(See pages C-3 to C-5 for details)

Example: **64 2 A - US32D - AM**

Architectural Builders Hardware Manufacturing, Inc.
1222 Ardmore Avenue, Itasca, IL 60143
Tel: 630-875-9900 • Fax: 630-875-9918 / 800-932-9224
Web: www.abhmfg.com • Email: abhinfo@abhmfg.com

