

# Hospital Push/Pull Latches



## 6800 Series - Low Profile Cylindrical Latches

Innovation, Quality, Customer Service...


### Standard Features

- Cylindrical latch application - passage function
- 1-3/4" standard door thickness (specify if different)
- Meets ADA requirements
- Trim mounts with four thru-bolts for maximum stability
- Handing of unit is field-reversible by easily reversing the cam holder assembly on the backside of the unit
- Linear acting cam which provides for a smoother operating unit
- One continuous spring provides a smoother operation and an extended life for the unit
- UL Listed in U.S.A and Canada for use on door fire rated 90 minutes or less, up to 4'0" x 8'0"
- 1/2" Latch Bolt Throw
- Patent# 7,258,374 & Additional Patents Pending

**Optional "Q"**  
**Quiet Latch available**  
**- Zero decibels gained**  
**when operating**  
**the handles.**  
**Patent(s) pending.**



Optional Round Cover & Custom Engraving Shown

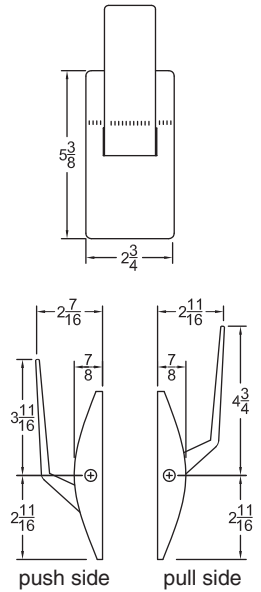

### Models

6811	6812	6813	6814	6816	6817	6818	6819
Push Down Pull Up Left Hand	Push Up Pull Down Left Hand	Push Up Pull Up Left Hand	Push Down Pull Down Left Hand	Push Down Pull Up Right Hand	Push Up Pull Down Right Hand	Push Up Pull Up Right Hand	Push Down Pull Down Right Hand

### How to Order:

Example: 6811 - 2 A - US32D - AM

**Model:** \_\_\_\_\_

- 6811 • 6812 • 6813 • 6814
- 6816 • 6817 • 6818 • 6819

**Latch Backset:** \_\_\_\_\_

- 2 = 2-3/4" • 5 = 5" • 3 = 3-3/4" • 7 = 7"

**Strike:** \_\_\_\_\_

- T = 2-3/4" T-Strike • A = 4-7/8" ASA Strike

**Finish:** \_\_\_\_\_

- US32D • US32 • US10B • US3
- US26D • US26 • US10 • US4

**Options, if Needed:** (See page C-3 to C-5 for details)

- H • AM • L • PL • PS • EX • X
- RC • SEC • THICK • P • Q • 3/4" Latch Bolt Throw



Architectural Builders Hardware Manufacturing, Inc.  
 1222 Ardmore Avenue, Itasca, IL 60143  
 Tel: 630-875-9900 • Fax: 630-875-9918 / 800-932-9224  
 Web: www.abhmfg.com • Email: abhinfo@abhmfg.com