



## Double-Lipped Strikes

### Standard Features

- Allows door to open in both directions without damaging the frame
- Door to be mounted on center hung pivot set – ABH 0327, 0127, 0128 or 0370 (see pivot section for details)
- For use on 1-3/4" thick doors - center hung or 1/8" inset
- Can be used in conjunction with ABH 4590 Rescue Stop (see page J-2 for details)
- Cut-out is standard for cylindrical latches. Custom units available for mortise locks (see pages J-5 to J-9)
- Standard models are for 5-3/4" and 6-3/4" frame size. Custom frame sizes available (see pages J-4 to J-9)
- Supplied with 8-32 x 3/8" undercut machine screws
- .074" thick stainless steel material
- Available in US32D, US32, US10B, US10, US3 and US4 finishes – Contact factory for custom finish
- Meets and/or exceeds ANSI Standard A1882

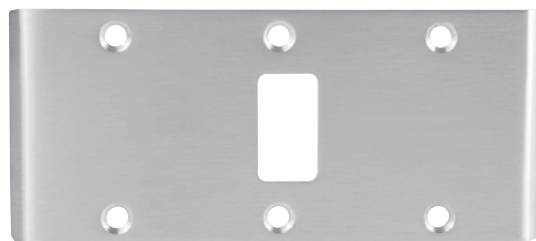

*Center Hung Door - Cylindrical Latch*  
DS4510 - 5-3/4" Frame  
DS4520 - 6-3/4" Frame

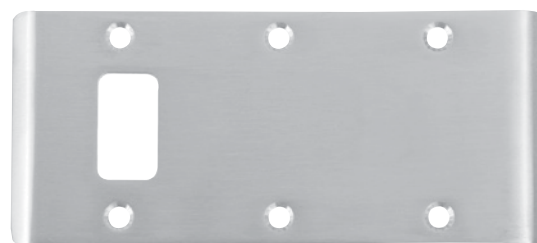

*1/8" Inset Door - Cylindrical Latch*  
DS4530 - 5-3/4" Frame  
DS4540 - 6-3/4" Frame

### Options

- SEC - Pin-in socket security fasteners

Model Number	Frame Size	Strike Height	Latch Type	Door Inset
DS4510	5-3/4"	2-3/4"	Cylindrical	Center Hung
DS4520	6-3/4"	2-3/4"	Cylindrical	Center Hung
DS4530	5-3/4"	2-3/4"	Cylindrical	1/8" Inset
DS4540	6-3/4"	2-3/4"	Cylindrical	1/8" Inset

