



600 Full mortise pin and barrel continuous hinge - steel

700 Full mortise pin and barrel continuous hinge - stainless steel

- 1/4" diameter pin with nylon self-lubricating, medical grade split bearing
- For doors weighing up to 300 pounds without reinforcing. 600 pounds with reinforcing
- 1/8" Inset recommended for 1 3/4" doors
- 48" Maximum door width
- Non handed for custom cut lengths
- Bevel or square edge door

Certifications

- Meets ANSI 156.26
- UL10C certified

Standard lengths

- 83", 85", 95", 120"

Standard mounting hardware

- #10 X 1/2" Self Drilling, Self Tapping Screws
- #10 X 1" Wood Screws

Material

- 600 - 1012 Cold-rolled steel
- 700 - 14 Gauge Type 304 stainless steel

Finishes

BHMA	Description	Substrate	Finish
600	Grey primer paint	Steel	USP
630	Satin stainless steel	Stainless steel	US32D

Custom paint available on 600 series, consult factory.

Options


- HT.....Hospital tip
- EPT.....Electric power transfer
- TW8.....Electrical through wire
- CON.....Allegion Connect

Optional mounting hardware

- SECHM.....Security screws - hollow metal door and frame
- SECWDHM.....Security screws - 1/2 wood, 1/2 hollow metal
- SECWDWD.....Security screws - wood door and frame
- WD.....Wood door and frame

For single door applications:

For pairs of doors see chart and general information

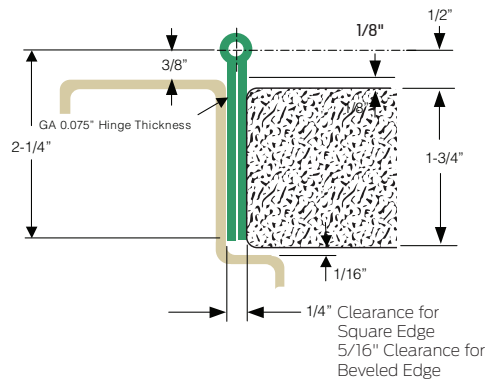

Hinges & pivots
A43

Pulls & plates
B

Flush bolts & coordinators
C

Latches, catches & bolts
D

Stops
E

Exterior hardware
F

Miscellaneous hardware
G