



SCHLAGE

# A Series

Cylindrical locks





## Contents

4	A Series introduction and performance features
5	Exploded view
6	Knob and lever designs
7	Knob designs and finishes
7	Door handing
8-9	Lock functions
10	Cylinder types
11	Standard cylinders
11	Primus® XP high security cylinders
12	Interchangeable core
12	IC conversion kits
12	IC installation tool
13	Latches
14	Strikes
14	Rabbeted latch and strike kit
15	Specifications and certifications

Pictured here: Levon lever shown  
in 626 satin chrome

Cover photo: Orbit knob shown  
in 626 satin chrome



# Put your trust in the name you know

For more than 90 years, Schlage has been creating the strongest and most technologically advanced security products for schools, hospitals, hotels, commercial and institutional buildings, multi-family properties and homes. From durable mechanical locks to comprehensive electronic access control solutions and biometrics, Schlage provides protection at critical moments – when property and personal security are at stake. With a wide range of products, styles and finishes, Schlage has products for the most demanding project specifications. In public buildings, in the workplace, and in homes, at the end of the day Schlage stands for one thing: strong.

## Real security is knowing exactly what you want and getting it

When you know exactly what you want, you don't want to waste time finding out whether it meets your project specifications. That's why we offer the world's largest team of hardware specification writers to help you and your clients turn your vision into reality. And when it comes to products, our commercial suiting options, wide variety of lever designs and rich selection of finishes give you the tools you need to make your projects perfect. You know what you want. With Schlage, you can be sure you'll get it.

### Safety, security and confidence

When you choose a Schlage lock, you can be sure you've done the job right, the first time. After all, our products are among the most durable and dependable on the market today. Our locks are easy to install, and simple to repair and maintain. That means fewer callbacks for you, and total safety and security for your customers.

# A Series

## Medium traffic commercial and heavy-duty residential locks

From military barracks and offices, to fine residential homes, Schlage A Series knobs easily stand up to constant use and abuse, while keeping people and property safe. Our A Series locks have an ANSI Grade 2 rating and come in a choice of styles and finishes that fit your building's design.

## We don't compromise on security

The safety and security of your buildings is something we take very seriously. That's why every Schlage lock and deadbolt undergoes intensive testing to determine its ANSI grade level:


- Cycle tests
- Resistance tests
- Door impact tests
- Warped door tests
- Bolt strength tests

Pictured here: Tulip knob shown in 626 satin chrome




# The lock that's built to last

- Cold-rolled steel, and machined and threaded hubs prevent loosening of the lockset by bolting the chassis to the door
- Heavy-duty cast mounting plate with specially tapped holes, keeps lockset tight on the door
- Patented door range adjuster allows quick and easy adjustment for doors ranging from 1<sup>3</sup>/<sub>8</sub>" to 1<sup>7</sup>/<sub>8</sub>" (35 mm to 48 mm) thick

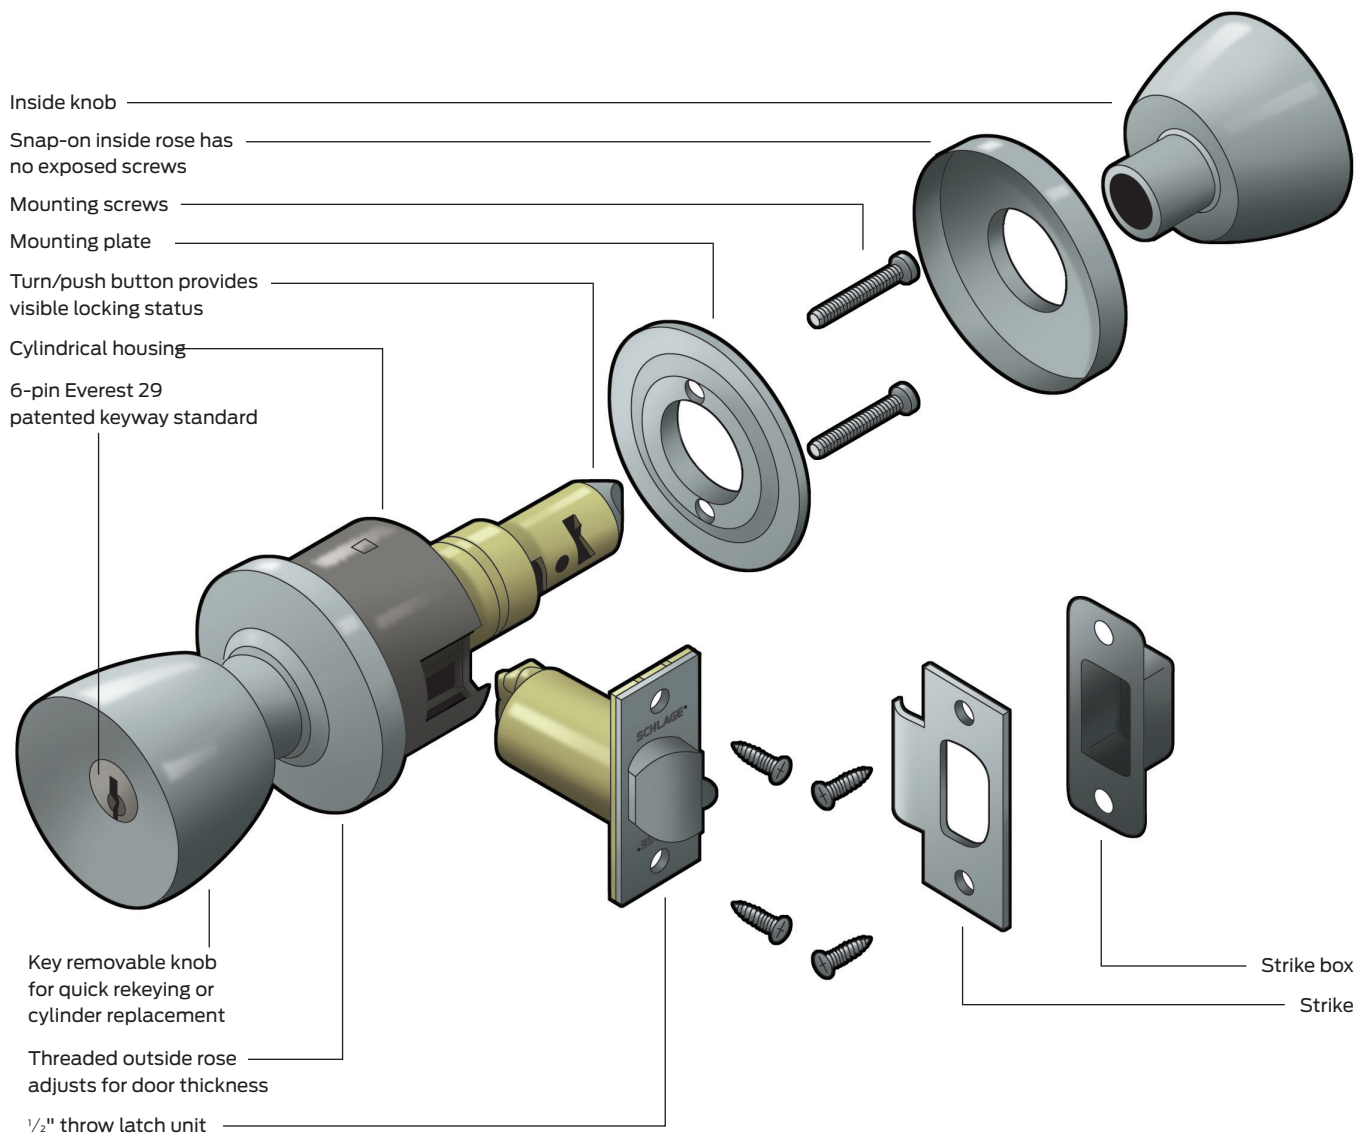

# A Series knob and lever designs


## Georgian (GEO)

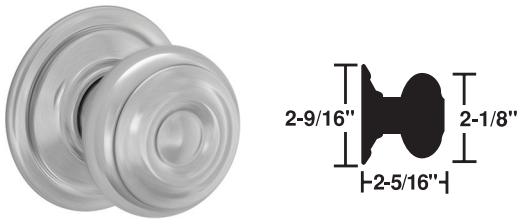

**Symbol:** GEO  
**Material:** Wrought brass




## Plymouth (PLY)

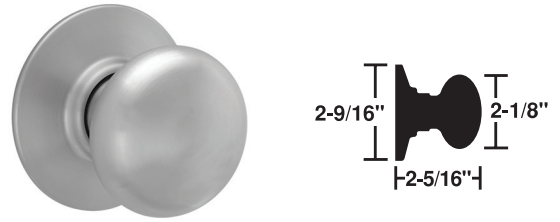

**Symbol:** PLY  
**Material:** Wrought brass, bronze or stainless steel



## Orbit (ORB)

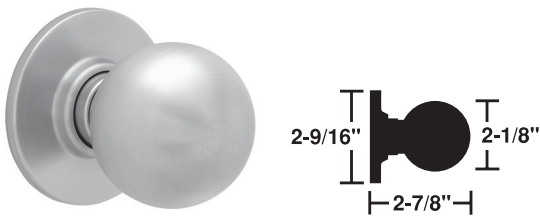

**Symbol:** ORB  
**Material:** Wrought brass or bronze




## Tulip (TUL)



**Symbol:** TUL  
**Material:** Wrought brass



## Levon (LEV)

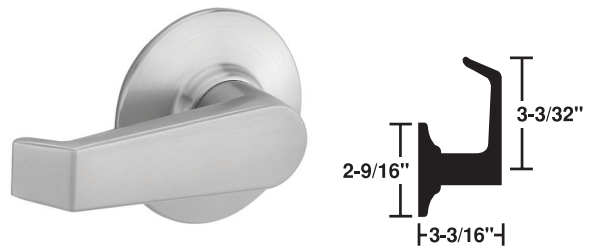




**Symbol:** LEV  
**Material:** Pressure cast zinc lever; wrought brass or bronze rose

**Note:** On keyed functions the LEV lever is available for inside trim only.



All designs shown in 626 satin chrome

-  = Standard cylinder.
-  = FSIC - full size interchangeable core option for Orbit design.
-  = Complies with ADA accessibility guidelines.

# Knob and lever finishes




A Series locks										
Georgian	•	•	•			•	•			•
Orbit	•	•	•	•	•	•	•			•
Plymouth	•	•	•	•	•	•	•	•	•	•
Tulip	•	•	•			•	•			•
Levon	•			•	•		•			•

e = an equivalent finish to the BHMA standard.

## Door handing

Many Schlage locks are reversible. Hand information is necessary to ensure proper cylinder orientation in keyed functions, and finish of latchbolt and strike for locks that are to be installed on reverse bevel doors. Follow the diagram to correctly determine the hand of the door.

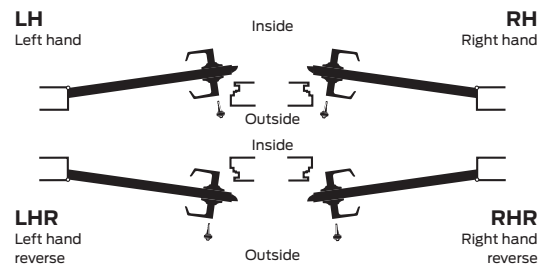

## ADA-compliant products




In compliance with the American National Standards Institute (ANSI A117.1) and the Americans with Disabilities Act (ADA), Schlage Lock Company offers a wide selection of locks designed for the needs of the physically challenged.

This act is designed to provide protection for people with disabilities.

Product information and specifications contained in this catalog are subject to change without notice. Please consult the factory.

# A Series lock functions

## ANSI A156.2 Series 4000 Grade 2

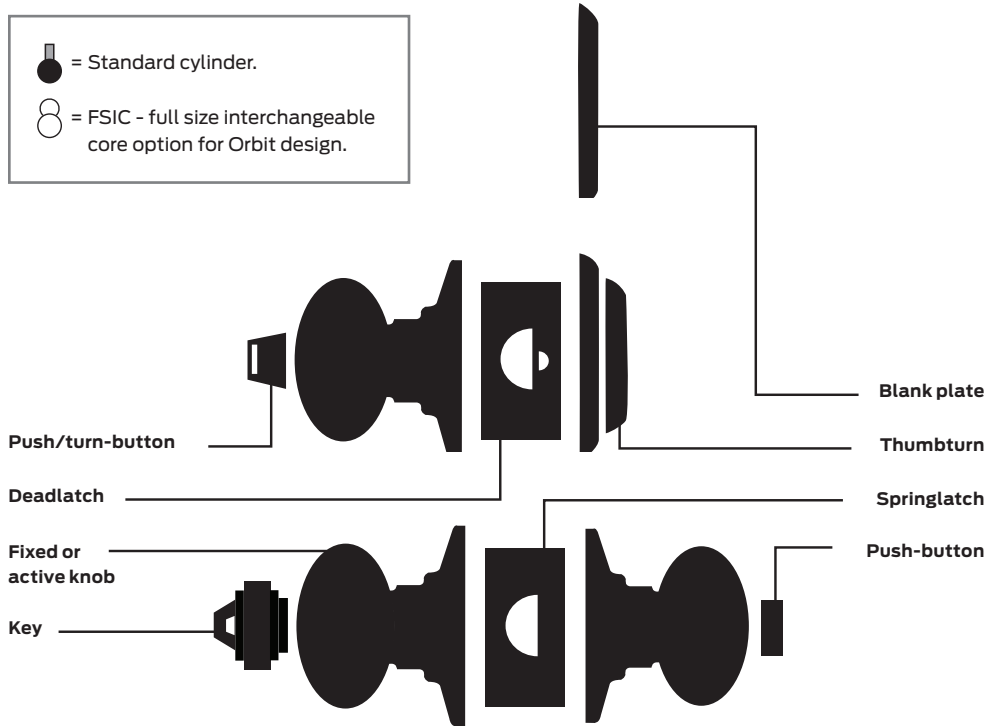


### Non-keyed functions

Schlage **A10**      ANSI **F75**

#### Passage latch

- Both knobs always unlocked



Schlage **A25D**

#### Exit lock

- Blank plate outside
- Inside knob is always unlocked
- Specify door thickness

Outside      Inside



Schlage **A30D**      ANSI **F77S**

#### Patio lock

- Push-button locking
- Turn inside knob or close door to release button and prevent lock-out

Outside      Inside



Schlage **A40**      ANSI **F76**

#### Bath/bedroom privacy lock

- Push-button locking  
Can be opened from outside with small screwdriver
- Turn inside knob or close door to release button

Outside      Inside



Schlage **A43**      ANSI **F79**

#### Communicating lock

- Turn-button in outer knob locks and unlocks knob and inside thumbturn

Outside      Inside





## Keyed functions

Schlage

**A170**

### Single dummy trim

- Dummy trim for one side of door
- Used for door pull or as matching inactive trim

Outside/Inside



Schlage

**A53**

ANSI

**F109**

### Entrance lock

- Turn/push-button locking: pushing and turning button locks the outside knob, requiring use of a key until button is manually unlocked
- Push-button locking: pushing button locks outside knob until it is unlocked by key or by turning the inside knob

Outside Inside



Schlage

**A70**

ANSI

**F84**

### Classroom lock

- Outside knob is locked and unlocked by key
- Inside knob is always unlocked

Outside Inside



Schlage

**A79**

### Communicating lock with blank plate

- Locked or unlocked by key from outside
- Blank plate inside

Outside Inside



Schlage

**A80**

ANSI

**F86**

### Storeroom lock

- Outside knob is fixed
- Entrance by key only
- Inside knob always unlocked

Outside Inside



Schlage

**A85**

ANSI

**F93**






### Faculty restroom lock

- Outside knob is fixed
- Entrance by key only
- Push-button on inside knob activates visual occupancy indicator, allowing only the emergency master key to operate
- Rotation of inside spanner button provides lock-out feature by keeping indicator thrown

Outside Inside



# Cylinders and key systems

Administrative Security	Schlage Everest 29™					
	Schlage Classic	End user exclusive nationwide	4N		9N	
		End user exclusive within time zone/country	4Z		9Z	
	End user exclusive within zip code	3G	9G			
	End user controlled; non-exclusive	3U	9U			
	Dealer exclusive within time zone/country	2	8			
	Dealer exclusive within zip code	1+	7			
	Authorized dealer only; non-exclusive	1				
End user controlled; non-exclusive		Authorized dealer only		No authorization		
 <b>OPEN</b> Schlage Everest 29 S FSIC & Conventional		 <b>RESTRICTED</b> Schlage Everest 29 R SFIC & Conventional* Schlage Everest 29 T FSIC & Conventional		 <b>OPEN</b> Schlage Classic FSIC & Conventional		
<ul style="list-style-type: none"> <li>Patented design</li> <li>Check pin in cylinder</li> </ul>		<ul style="list-style-type: none"> <li>Requires letter of authorization</li> <li>Patented design</li> <li>Check pin in cylinder</li> </ul>		<ul style="list-style-type: none"> <li>Duplicate anywhere</li> </ul>		
<b>Primus XP RESTRICTED</b> Schlage Classic FSIC & Conventional		<b>Primus XP RESTRICTED</b> Schlage Everest 29 R Conventional* Schlage Everest 29 S FSIC & Conventional Schlage Everest 29 T FSIC & Conventional		<b>UL 437 Option</b> UL listed security improvements available with Primus XP		
<ul style="list-style-type: none"> <li>5 levels of side bit milling exclusivity</li> <li>Patent protection to 2024</li> <li>Independent sidebar and finger pin locking mechanisms</li> </ul>		<ul style="list-style-type: none"> <li>5 levels of side bit milling exclusivity</li> <li>Patent protection to 2029</li> <li>Independent sidebar and finger pin locking mechanisms</li> </ul>		<ul style="list-style-type: none"> <li>Hardened steel drill pins</li> <li>Proven pick and drill resistant</li> <li>Withstands extreme physical attack</li> </ul>		

## Physical Security

### COMPARABLE ELECTRONIC SECURITY - Ensure your credential is as secure as your keyway

Proximity credentials

- Easily duplicated

MIFARE Classic® smart credentials

- Secure encrypted data & communications
- Difficult to duplicate

MIFARE Plus® & MIFARE® DESFire® EV1 smart credentials

- Advanced data encryption makes duplication nearly impossible
- Most secure credentials available from Schlage

\* As SL cylinder that accepts SFIC key

## Primus XP access control and high security cylinders

Primus XP access control and high security cylinders are available to add patented key finger control and varying degrees of geographical exclusivity to most Schlage 6-pin key systems, whether Everest 29 or Classic keyways.

In addition to a conventional pin tumbler mechanism, Primus cylinders incorporate a patented finger pin and sidebar design, providing a “dual-locking” cylinder that is virtually pick-proof. Resistance to drilling and other physical attack is optional by specifying 20-500 Series UL437 Listed cylinders.

Classic Primus XP cylinders are recommended for upgrading existing Classic key systems. Due to its extended patent life, the newly designed Everest 29 Primus XP is recommended for new key systems and for upgrading existing Everest key systems. Specify keyway to differentiate between Everest 29 and Classic. Example: C or CP (Classic) vs. S123 (Everest 29).

**Visit [us.allegion.com](http://us.allegion.com) for more information.**

# Standard cylinders

Standard cylinders are available in the patented Everest 29 or Classic keyways. Standard keyways are the Everest 29 S123 and S145 (factory masterkeyed systems). All other keyways available when requested.



## Standard cylinders - options


- 6-pin conventional (standard)
- Primus® high security
- Primus UL437 Listed high security
- Hotel function (A85) with indicator

Available in 606, 626 and 643e finish only.  
Everest 29 S123 keyway standard for commercial;  
C keyway standard for residential.

Cylinder for most functions




Hotel function Indicator cylinder



## New Everest SL cylinder


A full-size KIL cylinder that pins to the Schlage SFIC keyways

- Uses pick resistant L pins
- SFIC system owners can gain geographic exclusivity with Primus XP
- Achieves about 57,000 more combinations than a 6-pin system



Everest SL cylinder

## Horizontal tailpiece - knobs

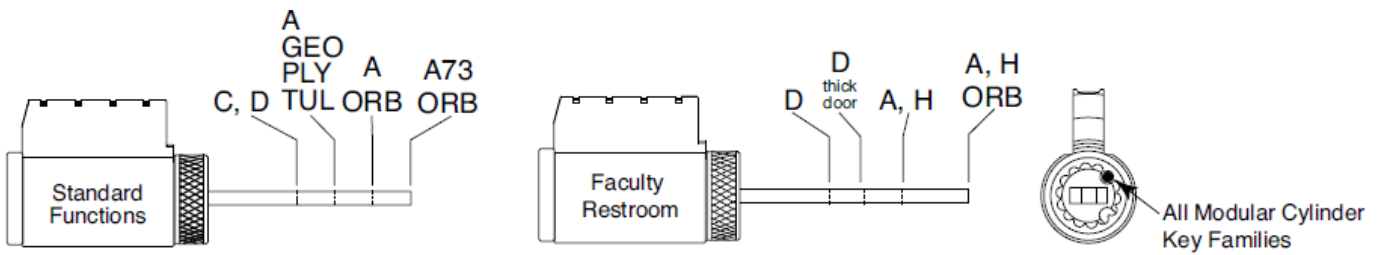

# Full size interchangeable core 8

Schlage FSIC full size interchangeable core (IC) locksets allow immediate rekeying at the door simply by using the special control key to replace the core in seconds.

IC locksets are available in Orbit design only.



## Cores only

### Full size interchangeable cores - options

(For JD suffix locksets)

- Conventional core
- Primus XP high security core

Available in 606, 626 and 643e finish only. Everest 29 S123 keyway standard for commercial; C keyway standard for residential.

FSIC - full size interchangeable core option for Orbit design.

Full size core




## FSIC conversion kits

It is easy to convert standard A Series locksets to accept Schlage FSIC interchangeable cores by changing the knob and adding the parts shown.

### Interchangeable core components - options

- Conversion kit: driver, retainer, knob, core
- Conversion kit: driver, retainer, knob
- Knob only (Orbit)
- IC installation tool

Full size IC conversion

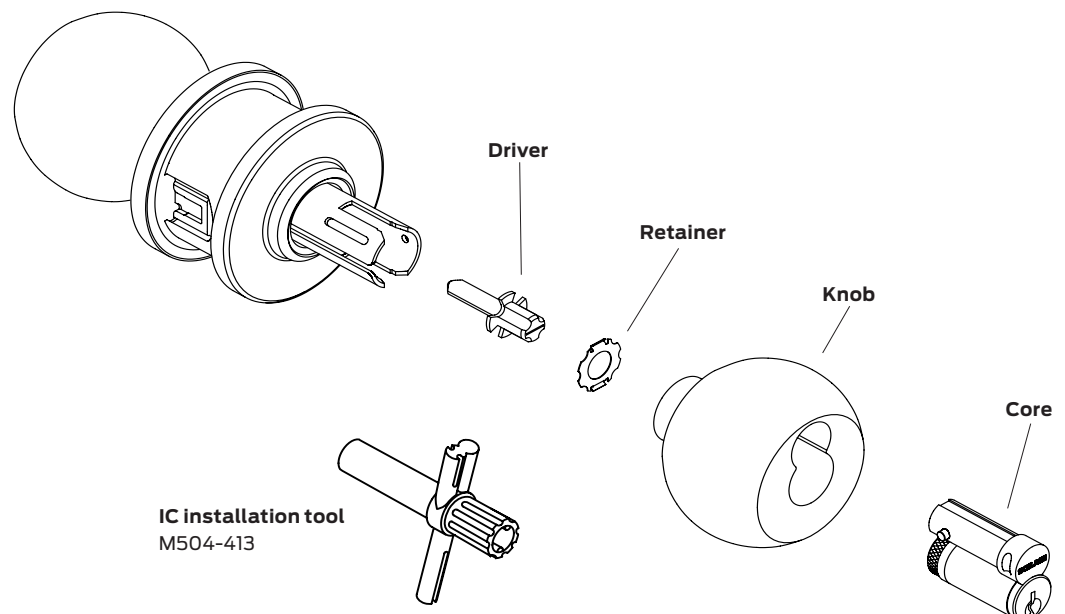


# Latches


A Series latches are adjustable for flat or beveled edge doors. Latches and strikes are furnished in brass, bronze, or chrome finishes, compatible with lock trim. When ordering separately, specify quantity, part number, and finish. Standard latches shown in bold type.

## Square corner latches

Springlatch




Deadlatch




## Round corner latches

Springlatch




Deadlatch




## Drive-in latches

Springlatch




Deadlatch



## Latches

Backset	Faceplate description	Hsg dia	Deadlatch 1/2" (13 mm) throw
2 3/8" (60 mm)	<b>1" x 2 1/4" (25 mm x 57 mm) square corner, standard</b>	<b>7/8" (22 mm)</b>	<b>11-085</b>
	1" x 2 1/4" (25 mm x 57 mm) 1/4" (6 mm) radius, round corner	7/8" (22 mm)	11-088
	1" (25 mm) circular drive-in (non-UL)	1" (25 mm)	11-104
2 3/4" (70 mm)	1" x 2 1/4" (25 mm x 57 mm) square corner	7/8" (22 mm)	11-091
	1 1/8" x 2 1/4" (29 mm x 57 mm) square corner	1" (25 mm)	11-096
	1" x 2 1/4" (25 mm x 57 mm) 1/4" (6 mm) radius, round corner	7/8" (22 mm)	11-092
	1" (25 mm) circular drive-in (non-UL)	1" (25 mm)	11-105
3 3/4" (95 mm)	1 1/8" x 2 1/4" (29 mm x 57 mm) square corner	1" (25 mm)	11-103

**Latch front adapter**  
A501-878




Used to convert 1" wide square front faceplates for 1 1/8" wide door preparations. Furnished in black plastic. Order in units of 100 each.

## Long backsets

Backsets 5" require extension links. A Series locks with long backsets are normally furnished with 1" faceplates and 7/8" housings. Links installed in 1" latch holes require one G506-815 sleeve (order separately) to join latch and link.

**5" extension link**



**Sleeve**  
G506-815  
(order separately)




## Door reinforcement

Reinforcing unit is required to reinforce and help prevent the collapse of hollow metal doors when locksets are tightly mounted. This kit should be used with long backsets for A Series lock installations in hollow metal doors to prevent lateral movement of the latchbolt. Specify door thickness, 1 3/8" (35 mm) or 1 3/4" (44 mm), when ordering reinforcement kits.

**Reinforcement kit**  
37-001

Kit includes:


**Reinforcement**  
A501-566 for 1 3/4" doors or  
A501-565 for 1 3/8" doors



# Strikes

All Schlage strikes are furnished complete with screws. The 10-001 standard A Series strike has a 1 1/8" (29 mm) lip. Standard strikes shown in bold type.

Number	Lip length	Description
10-001	<b>1", 1 1/8" (std), 1 1/4", 1 1/2", 1 3/4", 2"</b> (25 mm, 29 mm, 32 mm, 38 mm, 44 mm, 51 mm)	<b>1 1/8" x 2 3/4" (29 mm x 70 mm) square corner, standard</b>
10-004	1 1/8" (29 mm)	1 1/8" x 2 3/4" (29 mm x 70 mm) 1/8" (3 mm) radius, round corner
10-025	1 3/16", 1 3/8" (30 mm, 35 mm)	1 1/4" x 4 7/8" (32 mm x 124 mm) ANSI
10-026	1 1/8" (29 mm)	1 5/8" x 2 1/4" (41 mm x 57 mm) full lip, square corner
10-027	1 1/8" (29 mm)	1 5/8" x 2 1/4" (41 mm x 57 mm) full lip, 1/4" (6 mm) radius, round corner
10-058	1 7/32" (31 mm)	1 3/4" (44 mm) circular, adjustable
K510-066	—	Box, ANSI



**T-strike – standard**  
10-001

1 1/8" x 2 3/4" x 3/32"  
(29 mm x 70 mm x 2 mm)




**ANSI strike**  
10-025

1 1/4" x 4 7/8" x 3/32"  
(32 mm x 124 mm x 2 mm)

## Rabbeted latch and strike kit

Rabbeted latch and strike kit finishes: 605, 626. This kit adapts square corner latches and strikes for 1/2" (13 mm) rabbeted door and frame preparations.

**Rabbeted latch and strike kit**  
39-030

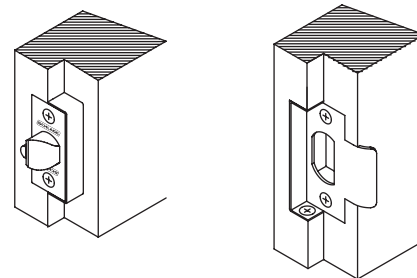

## Ordering instructions

Example												
Line item	Qty	Outside		Inside		Hand	Latch	Strike	Dr thk	Ext	Dim	Additional details
		Des	Fin	Des	Fin							
1	10	PLY	626	LEV	613	-	11-085	10-001	178	EE	-	KA

**Line item:** Line item number

**Qty:** Quantity

**Product:** Product function + cylinder code

**Outside des:** Outside lever design

**Outside fin:** Outside finish

**Inside des:** Inside lever design - Specify only if different from outside lever design

**Inside fin:** Inside finish - Specify only if different from outside finish

**Hand:** Hand of door - N/A for A lock

**Latch:** Product latch - Leave blank for standard latch or specify part number if non-standard latch is required

**Strike:** Product strike - Leave blank for standard strike or specify part number if non-standard strike is required

**Dr thk:** Door thickness - Enter door thickness if non-standard (example: 138=1 3/8"; 214=2 1/4")

**Ext:** Extension - Enter for doors 1 7/8" or greater (example: EE=extended equally; EI=extended inside; EO=extended outside; ED=extended differently)

**Dim:** Dimension - Enter only for non-standard strike lip length

**Additional details:** Enter additional detail for keying information or special requirements

# Specifications

**Handing:**

Keyed functions are reversible. Non-keyed functions are not handed.

**Door thickness:**

1<sup>3</sup>/<sub>8</sub>" to 1<sup>7</sup>/<sub>8</sub>" (35 mm to 48 mm) standard.  
2" (51 mm) to 2<sup>1</sup>/<sub>2</sub>" (64 mm) optional extended inside.

**Backset:**

2<sup>3</sup>/<sub>8</sub>" (60 mm) standard. 2<sup>3</sup>/<sub>4</sub>" (70 mm), 3<sup>3</sup>/<sub>4</sub>" (95 mm) and 5" (127 mm) optional.

**Front:**

Steel. 1<sup>1</sup>/<sub>8</sub>" x 2<sup>1</sup>/<sub>4</sub>" square corner, beveled, for 2<sup>3</sup>/<sub>4</sub>" backset standard. Optional 1" square corner, 1" radius corner, and non-UL drive-in/round face. For availability with specific backsets, see page 16.

**Lock chassis:**

Steel, zinc dichromate plated for corrosion resistance.

**Latch bolt:**

Brass, chrome plated, 1/2" throw, deadlocking on keyed and exterior functions.

**Exposed trim:**

Wrought brass, bronze or stainless steel. Levers are pressure cast zinc, plated to match finish symbols.

**Strike:**

T-strike 1<sup>1</sup>/<sub>8</sub>" x 2<sup>3</sup>/<sub>4</sub>" (29 mm x 70 mm) x 1<sup>1</sup>/<sub>8</sub>" (29 mm) lip to center with box standard. Optional strikes, lip lengths and ANSI strike box available. See page 17.

**Cylinder and keys:**

Commercial: 6-pin patented Everest 29 S123 keyway standard with two nickel silver keys per lock.

Residential: 6-pin C keyway, keyed 5-pin.

**Keying options:**

Interchangeable core and Primus XP high security cylinders. Master keying, grand master keying, and construction keying.

**Warranty:**

Commercial: three-year limited.

# Certifications

**ANSI:**

Meets or exceeds A156.2 Series 4000, Grade 2 strength and operational requirements.

**Federal:**

Meets FF-H-106C.

**California state reference code:**

(Formerly Title 19, California State Fire Marshal Standard)  
All levers with a return to door of 1/2" (64mm) or less comply.


**UL/cUL:**

All locks listed for A label single doors, 4' x 8'.  
Letter F and UL symbol on latch front indicate listing.  
UL437 Listed locking cylinder optional: specify Primus XP 20-500 Series cylinder.

**ADA compliant:**

Schlage Lock Company offers a wide selection of locks designed to meet the Americans With Disabilities Act.

# Product identification

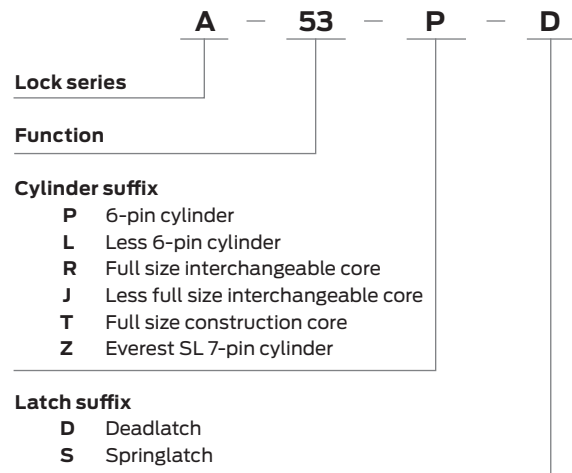

## About Allegion

Allegion (NYSE: ALLE) is a global pioneer in safety and security, with leading brands like CISA®, Interflex®, LCN®, Schlage®, SimonsVoss® and Von Duprin®. Focusing on security around the door and adjacent areas, Allegion produces a range of solutions for homes, businesses, schools and other institutions. Allegion is a \$2 billion company, with products sold in almost 130 countries.

For more, visit [www.allegion.com](http://www.allegion.com)

KRYPTONITE ■ LCN ■  ■ STEELCRAFT ■ VON DUPRIN