



PS902

2 amp Power Supply

Overview

Schlage's comprehensive line of power supplies and option boards were designed to address the changing needs of the access control market.

Installation is simplified by utilizing a flat mounting design and polarized locking connectors for option boards. This new design eliminates the need for racks and side connectors. The flat mounting of the option boards also provides for easier access to the terminal blocks for connection of electrified devices (such as electrified strikes, electromagnetic locks, card readers, etc).

Common to the line of PS900 Series power supplies is a constant output rating at both 12v and 24v settings, universal 120 VAC to 240 VAC input, and polarized option board connectors. New fire alarm interface board mounting allows outputs to be configured as switched (power cut) or unswitched (power continues) when signal provided.

* All PS900 Series of power supplies and option boards have been tested and certified to meet UL 294.



*Photo as shown includes optional board(s)
Please contact your local sales office or visit the support section on our website for configuration assistance.*


System Components
PS902 Power Supply

Features and Benefits

- 2A @ 12/24 VDC output, field selectable with jumper
- Class 2 Rated power limited output
- Universal 120 -240 VAC input
- Low voltage DC, regulated and filtered
- Single polarized connector for distribution board
- Fused primary input
- AC input and DC output monitoring circuit w/ LED indicators
- Cover mounted AC input indication
- Hinged cover w/ lock down screws
- High voltage protective cover

OPTIONS

- Emergency Interface Relay (FA)
- Battery Backup
- 2 relay QEL panic device control board
- 4 relay distribution board
- 4 relay distribution board with logic
 - Field configurable for:
 - Time delay function
 - Auto operator
 - Security interlock
- 8 fused output distribution board
- 8 PTC output distribution board

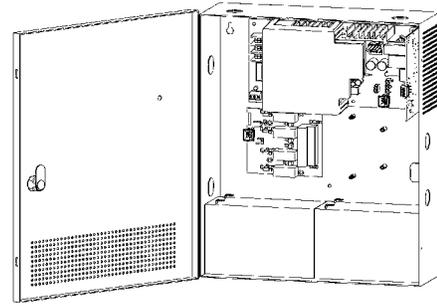

PS902

PS902 Power Supply Specifications	
Specification	Description
Input Voltage	120/240 VAC, 50/60 Hz, universal input
Output Voltage	2A @ 12 or 24 VDC Field selectable with jumper Switching supply, 5% regulation, 240mVpp max ripple
Enclosure	Grey / Baked enamel 14"H x 12"W x 4"D Eight 1/2" x 3/4" Knockouts NEMA Grade 1 Hinged cover with lock down screws
Operating Temperature	32°-120° F (0°-49° C)
Certifications	UL 294 Class 2 RoHS FCC Part 15
Option Board Compatibility	900-BB: Battery Backup 900-BBK: Battery Backup Kit (backup board and battery pack) 900-FA: Fire Alarm 900-2Q: 2 Relay QEL control Board 900-4R: 4 Relay Output Board 900-4RL: 4 Relay Logic Board 900-8F: Fused 8 Zone Distribution Board 900-8P: PTC 8 Zone Distribution Board
AC Primary Fuse Size	3.15A, 250v, 5 x 20mm SLOW-BLOW
Battery Fuse Size	7.5A 32v ATO blade style
DC Output Protection	Overload protection - current limited foldback circuit
Indicators	LED indicators: -AC input (visible on outside of enclosure) -DC output Isolated SPDT contacts to monitor AC power status
Weight (Power Supply)	Approx. 9.0 lbs
Weight (Each Battery)	4.0 lbs
AC Input Termination	3 position terminal block with protective cover Wire capacity: 10 AWG max.
DC Output Termination	2 position terminal block Wire capacity: 12 AWG max.
Distribution board connectors	1
Fire Alarm board connector	Yes
Keylock	Optional

VON DUPRIN®

PS914 4 amp Power Supply (Von Duprin)

Overview

Von Duprin's power supply and option boards were designed to meet the specific requirements of electrified fire exit devices.

Installation is simplified by utilizing a flat mounting design and polarized locking connectors for option boards. This new design eliminates the need for racks and side connectors. The flat mounting of the option boards also provides for easier access to the terminal blocks for connection of electrified devices (such as electrified panic devices, strikes, card readers, etc).

Common to the line of PS900 Series power supplies is a constant output rating at both 12v and 24v settings, universal 120 VAC to 240 VAC input, and polarized option board connectors. New fire alarm interface board mounting allows outputs to be configured as switched (power cut) or unswitched (power continues) when signal provided.

* All PS900 Series of power supplies and option boards have been tested and certified to meet UL 294.



*Photo as shown includes optional board(s)
Please contact your local sales office or visit the support section on our website for configuration assistance.*

System Components
PS914 Power Supply

Features and Benefits

- 4A @ 12/24 VDC output, field selectable with jumper
- Designed with high in rush current for powering electrified panic devices
- Universal 120 -240 VAC input
- Low voltage DC, regulated and filtered
- Electronic power limiting foldback circuit for AC current overload protection
- Two polarized connectors for distribution boards
- Fused primary input
- AC status monitor - isolated SPDT contacts
- AC input and DC output LED status indicators
- Cover mounted AC input indication
- Hinged cover w/ lock down screws
- High voltage protective cover

OPTIONS

- Fire Alarm Relay (FA)
 - Must be installed on distribution boards
- Battery Backup
- 2 relay EL panic device control board
- 2 relay QEL panic device control board
- 4 relay distribution board
- 4 relay distribution board with logic
 - Field configurable for:
 - Time delay function
 - Auto operator
 - Security interlock
- 8 fused output distribution board
- 8 PTC output distribution board

PS914 Power Supply Specifications	
Specification	Description
Input Voltage	120/240 VAC, 50/60 Hz, universal input
Output Voltage	4A @ 12 or 24 VDC Field selectable with jumper Switching supply, 5% regulation, 360mVpp max ripple
Enclosure	Grey / Baked enamel 14"H x 12"W x 4"D Eight 1/2" x 3/4" Knockouts Hinged cover with lock down screws
Operating Temperature	32°-120° F (0°-49° C)
Certifications	UL 294 RoHS FCC Part 15 Class 2
Option Board Compatibility	900-BB: Battery Backup 900-BBK: Battery Backup Kit (backup board and battery pack) 900-FA: Fire Alarm (<i>Must be installed on distribution boards</i>) 900-2RS: 2 Relay EL panic device control board 900-2Q: 2 Relay QEL panic device control Board 900-4R: 4 Relay Output Board 900-4RL: 4 Relay Logic Board 900-8F: Fused 8 Zone Distribution Board 900-8P: PTC 8 Zone Distribution Board
AC Primary Fuse Size	6.3A, 250v, 5 x 20mm SLOW-BLOW
Battery Fuse Size	7.5A 32v ATO blade style
DC Output Protection	Overload protection - current limited foldback circuit
Indicators	LED indicators: -AC input (visible on outside of enclosure) -DC output Isolated SPDT contacts to monitor AC power status
Weight (Power Supply)	Approx. 9.0 lbs
Weight (Each Battery)	4.0 lbs
AC Input Termination	3 position terminal block with protective cover Wire capacity: 10 AWG max.
DC Output Termination	2 position terminal block Wire capacity: 12 AWG max.
Distribution board connectors	2
Fire Alarm board connector	No
Keylock	Optional

