# HINGE (PULL) SIDE MOUNTING


- Standard 4310ME Series closer shipped with a 24V or 120V cylinder (please specify) on a mounting plate, metal cover, Swing-Free arm, track, track roller, and wood and machine screw pack. See 4310ME Series pages 29 & 30 for options.
- Sized cylinders for interior doors to 4′0″.
- Functions as full rack and pinion door closer when hold-open is not engaged or current is interrupted with Swing-Free arm engaged.
- Handed for right or left swinging door.
- Concealed or exposed electrical connections.
- Built-in "On/Off" switch controls hold-open function.
- Swing-Free arm allows door to be moved without door closer resistance.
- Interfaces with fire alarm systems.
- Standard or optional custom powder coated finish.
- Optional plated finish on cover, arm, and fasteners.

# 4310ME SERIES

The 4310ME SENTRONIC® is a heavy duty, electrically controlled closer/holder designed to provide infinitely adjustable hold-open for fire and smoke barrier doors.

Door is held open until current interruption releases mechanism and the door closes. Single lever (track) arm closer is specifically designed for interior doors. Choice of finishes, cylinder functions, and installation accessories meet virtually all life safety requirements.

The 4310ME is UL listed for smoke barrier or labeled fire doors. Tested and certified under ANSI Standard A156.15. Conforms to life safety code, NFPA 101. An ME provides only the closer/holder function.

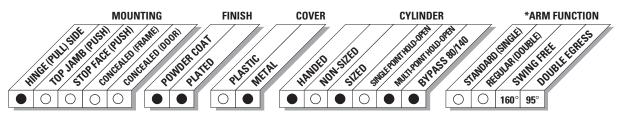

AVAILABLENOT AVAILABLE

 Maximum hold-open with standard template. See individual closer series for degrees of opening and hold-open per installation.



# 4310ME SERIES

# HINGE (PULL) SIDE MOUNTING

Information applies to ME closer.


## **MAXIMUM OPENING**

Templating allows 180° with hold-open points up to 160°.

Optional double egress arm limited to 95°. Please note that many track style door closers are capable of allowing 180° of door swing. Be aware that the majority of track style closers are at their weakest closing force in the 180° – 130° range. Consult factory for applications where exterior or large/heavy door must swing 180°.

# **ME ELECTRICAL OPTIONS**

These assemblies have a single electrical circuit with a choice of voltages. A separate TRANSFORMER, 4040SE-3210, can be used to reduce line voltage to 24V AC. Circuitry accepts either AC or DC input. Please specify 24V or 120V.

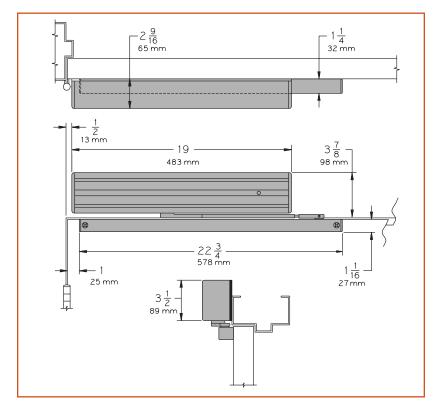

- **Butt Hinges** should not exceed 4-1/2" (114 mm) in width.
- **Top Rail** 1-1/16" (27 mm) minimum.
- **Reveal** should not exceed 1/8" (3 mm) for Swing-Free arm. Should not exceed 2-11/16" (68 mm) for double egress arm.
- **Head Frame** requires 2" (51 mm) minimum.
- **Clearance** of 1-1/4" (32 mm) behind door required for installation.
- **Bypass** (suffix "B80 or B140") eliminates hold-open function up to a specified point of the doors swing.

  B80 cylinder from 0° to 80°.


  B140 cylinder from 0° to 140°.
- Wiring Diagram

#### **Options**

- Hold-open bypass.
- Double egress arm.
- 24V or 120 volt input, please specify.

#### **Special Templates**

Customized installation templates or products may be available to solve unusual applications. Contact LCN Product Support for assistance.

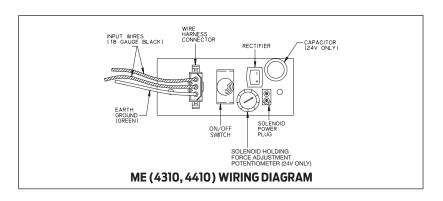



# **CYLINDER**

#### **ME CYLINDER. 4310ME-3971**

Standard, handed cast iron cylinder assembly. Please specify 24V or 120V.

#### **ME CYLINDER, 4310ME-3071**

Standard, handed cylinder and mounting plate assembly. "On/Off" switch assembly controls hold-open function. Circuitry accepts either AC or DC input. Please specify 24V or 120V.

# **COVERS**

## **COVER, 4310ME-72MC**

Handed, metal cover.

## **ARMS**

## SWING-FREE ARM, 4310ME-3077SF

Handed arm.

After door is placed in hold-open, secondary pivot point allows up to 160° swing without door closer resistance.

## **DOUBLE EGRESS ARM, 4310ME-3077DE**


Optional, handed arm for double egress doors and frames. 2-11/16" (68 mm) maximum reveal.


# **TRACK**


#### TRACK, 4310ME-3038


Standard, non-handed track.


# 4310ME SERIES
















# 4310ME SERIES

# **SWITCH**

# SWITCH, 4310ME-3351

"On/Off" switch assembly provides continuous hold-open function. Available as 24V or 120V, please specify.



# TRACK ROLLER, 4310ME-3034


Quiet, low friction roller assembly. Shoulder dimension "X" = 1/8" (3mm).


#### **TRANSFORMER, 4310-3210**


Reduces line voltage from 120V to 24V AC. Mounted on cover for 4'' (102 mm) x 4'' x 2-1/8'' (54mm) junction box (by others).


## **ME WIRING HARNESS, 4310ME-3354**

Three wire harness with 6  $^{\prime\prime}$  (152 mm) leads for field wiring connections.











# **TABLE OF SIZES**

Closing power of 4314ME Series closers may be increased 15%.

#### INTERIOR DOOR WIDTH



Indicates recommended range of door width for closer size.

# 4310ME SERIES

# HOW-TO-ORDER 4310ME SERIES CLOSERS

#### 1. SPECIFY HAND

 $\square RH$ 

□LH

#### 2. VOLTAGE

□24V AC/DC

 $\Box$ 120V AC/DC

#### 3. SPECIFY FINISH

☐ Standard Powder Coat \_\_\_\_\_ Aluminum, Dark Bronze, Statuary, Light Bronze, Black, Brass.

# Closer will be shipped with:

- STANDARD COVER,
- SWING-FREE (SF) ARM,
- STANDARD TRACK,
- TRACK ROLLER,
- WOOD & MACHINE SCREW PACK, unless options listed below are selected.

# **CLOSER OPTIONS**

#### CYLINDER FUNCTION

- ☐ Bypass 80° (B80)
- ☐ Bypass 140° (B140)

#### ARM

□ Double Egress (DE)

#### **FINISHES**

- □ Custom Powder Coat (RAL)
- □ Plated Finish. US

#### **SCREW PACK**

- ☐ TB\*, Wood & Machine Screw (TBWMS)
- ☐ TORX Machine Screw (TORX)
- ☐ TB\* & TORX Machine Screw (TBTRX)
  - \*Specify door thickness if other than 1-3/4".

# **INSTALLATION ACCESSORIES**

☐ Transformer, 4310ME-3210

# **SPECIAL TEMPLATE**

□ST-\_\_\_\_

