

4600(LN) Series ANSI/BHMA Grade 2 Certified

Cylindrical Locks



ASSA ABLOY



Table of Contents

CONTENTS

enefits & Features	-
enenis a realures	
ow to Order	2
nishes	Ę
im Designs	6
unctions	-8
ylinders/Keying	Ć
atchbolts	(
rikes	-

4600(LN) CYLINDRICAL LOCKS

Yale® 4600(LN) cylindrical locks are the ideal choice for a wide variety of commercial applications where consistent quality, ease of use and installation are required at an economical price. The 4600(LN) Series is certified to ANSI/BHMA Grade 2 standards and is UL fire-listed for all functions, ensuring reliability and peace of mind.

To make your building work better with your budget, Yale Works for You^{SM} .



Benefits & Features

BENEFITS

- Versatile: Field reversible handing and other product options offer flexibility in many commercial applications
- Economical: Priced affordably to suit projects of all budgets
- Secure: Quality security from a trusted brand for over 170 years
- Strong & Reliable: ANSI/BHMA Grade 2 certified for long life and reliability

FEATURES

- Field reversible handing for easy installation
- Range of functions and options for a wide variety of commercial applications
- Available in four trims and eight finishes
- ADA compliant for ease of accessibility



SPECIFICATIONS

Backset:	2-3/4" standard, 2-3/8" optional
Door Thickness:	Adjustable for doors 1-3/8" to 1-3/4"
Handing:	Non-handed, field reversible
Latchbolt:	2-3/4" backset, 1/2" throw latchbolt deadlocking. See page 10 for additional options.
Strike:	ANSI strike 4-7/8" x 1-1/4" x 1-1/4" lip to center. See page 11 for additional options.
ANSI/BHMA:	Certified Grade 2, ANSI/BHMA A156.115
UL/cUL:	Listed for 3 hour fire doors
Windstorm:	Certified, check local codes.
Warranty:	3 years





How To Order

Design	Function	Hand	Latch	Strike	Cylinder	Door Thickness	Keying	Finish
Levers AU - August MO - Monroe PB - Pacific Beach Knob CA - Carolina	4601LN - Passage or Closet Latch (Lever) 4601 - Passage or Closet Latch (Knob) 4602LN - Privacy, Bedroom or Bath Lock (Lever) 4602 - Privacy, Bedroom or Bath Lock (Knob) 4604LN - Entry Lock (Lever only) 4605LN - Storeroom or Closet Lock (Lever) 4605 - Storeroom or Closet Lock (Knob) 4607LN - Entry Lock (Knob) 4607LN - Entry Lock (Knob) 4607LN - Classroom Lock (Lever) 4608 - Classroom Lock (Knob) 4628LN - Communicating Passage Lock (Lever only) 4655LN - Single Dummy Trim (Lever)	RH LH		standard for lever trim; 371 T-strike standard for knob trim.	1806 (knob) 6-pin cylinder standard; see page 9	Adjustable between 1-3/8" to 1-3/4"; please specify.	KR (keyed random) standard, see page 9 for additional details/ options.	605 - Bright Brass, Clear Coated 606 - Satin Brass, Clear Coated 612 - Satin Bronze, Clear Coated 613E - Dark Oxidized Satin Bronze - equivalent 625 - Bright Chrome Plated 626 - Satin Chrome Plated 629 - Bright Stainless Steel 630 - Satin Stainless Steel Not all finishes available for all trims, see page 5 for details.


ORDERING EXAMPLE

Design	Function	Hand	Latch	Strike	Cylinder	Door Thickness	Keying	Finish
AU	4607LN	RH	MCD234	497	1806	1-3/4"	KR	626



Finishes

ANSI/BHMA Code **Finish Description**

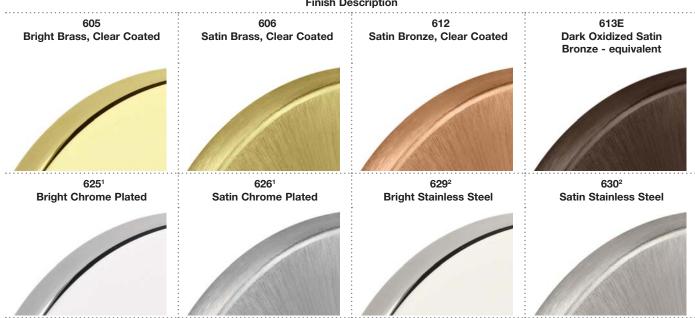

- Finish available for lever trim only.
 Finish available for knob trim only.



Trim Designs

LEVERS


AUGUSTA AU

Lever: Cast Zinc Rose: Wrought Brass










MONROE MO

Lever: Cast Zinc Rose: Wrought Brass










PACIFIC BEACH PB

Lever: Cast Zinc Rose: Wrought Brass









Note: Except for 626 finish, extended lead times apply for Monroe (MO) lever handle. Contact Customer Service for more information.

KNOB

CAROLINA CA

Knob: Stainless Steel or


Wrought Brass Stainless Steel or

Wrought Brass



Rose:





All levers and knob available with small format interchangeable core. See page 9 for details.

Dimensions shown are in inches/mm.



Functions

LEVERS

4601LN (F75)



Passage or Closet Latch

- · For doors that do not require locking.
- · Either lever operates latchbolt at all times.

4602LN (F76A)



Privacy, Bedroom or Bath Lock

- · For lavatory or other privacy doors.
- Either lever operates latchbolt unless outside lever is locked by pushbutton inside.
- Button automatically releases when inside lever is turned or door is closed.
- Emergency release in outside lever.
- · Inside lever always active.

4604LN (F82A)



Entry Lock

- For entrance or office doors.
- · Deadlocking latchbolt.
- Either lever operates latchbolt (except when outside lever is locked from inside).*
- Pushing button in inside lever locks outside lever. (Automatically releases when inside lever is turned or key is rotated in locked outside lever.)
- Latchbolt is operated by key in outside lever or by rotating inside lever.
- · Inside lever always active.

4605LN (F86)



Storeroom or Closet Lock

- For use on storeroom, utility, exit doors.
- Deadlocking latchbolt.
- Latchbolt operated by lever inside, key in outside lever.
- Outside lever always rigid.
- · Inside lever always active.

4607LN (F109)



Entry Lock

- For entrance, general home or office doors.
- Deadlocking latchbolt.
- Either lever operates latchbolt (except when outside lever is locked from inside).
- Pushing turn button in inside lever locks outside lever. (Automatically releases when inside lever is turned or key is rotated in locked outside lever.)
- Outside lever may be retained in locked position by pushing and rotating turn button 90° clockwise to a horizontal position; not released until turn button is manually returned to the vertical position.
- Latchbolt is operated by key in outside lever or by rotating inside lever.
- Inside lever always active.

4608LN (F84)



Classroom Lock

- For classroom or utility room doors.
- Deadlocking latchbolt.
- Either lever operates latchbolt (except when outside lever is locked by key).
- Inside lever always active.
- Key releases outside lever.

4628LN (F111)



Communicating Passage Lock

- For twin communicating or exit doors where one side operation is required.
- Also when space is limited between door and switch panel.
- Deadlocking latchbolt.
- One lever operation.
- Blank rose.
- Should be used only where rooms have more than one entrance.

4655LN



Single Dummy Trim


- For non-operational levers used for decorative trim.
- Rigid lever.



Functions

KNOBS


4601 (F75)



Passage or Closet Latch

- · For doors that do not require locking.
- · Either knob operates latchbolt at all times.


4602 (F76A)



Privacy, Bedroom or Bath Lock

- For lavatory or other privacy doors.
- Either knob operates latchbolt unless outside knob is locked by pushbutton inside.
- Button automatically releases when inside knob is turned or door is closed.
- Emergency release in outside knob.
- · Inside knob always active.


4605 (F86)



Storeroom or Closet Lock

- For use on storeroom, utility, exit doors.
- · Deadlocking latchbolt.
- Latchbolt operated by knob inside, key in outside knob.
- · Outside knob always rigid.
- Inside knob always active.


4607 (F109)



Entry Lock

- For entrance, general home or office doors.
- Deadlocking latchbolt.
- Either knob operates latchbolt (except when outside knob is locked from inside).
- Pushing turn button in inside knob locks outside knob. (Automatically releases when inside knob is turned or key is rotated in locked outside knob.)
- Outside knob may be retained in locked position by pushing and rotating turn button 90° clockwise to a horizontal position; not released until turn button is manually returned to the vertical position.
- Latchbolt is operated by key in outside knob or by rotating inside knob.
- Inside knob always active.

4608 (F84)



Classroom Lock

- For classroom or utility room doors.
- · Deadlocking latchbolt.
- Either knob operates latchbolt (except when outside knob is locked by key).
- Inside knob always active.
- Key releases outside knob.

4655



Single Dummy Trim

- For non-operational levers used for decorative trim.
- Rigid knob.



Cylinders/Keying

Illustration	Туре	Model Number	Number of Pins
	Key-in-Knob Cylinder	1805	6
	Key-in-Lever Cylinder	1806	6

Keying:

All cylinders furnished standard 6-pin, keyed random in Yale® PARA keyway, pinned to Yale .019" specification. Each cylinder furnished with two nickel silver keys. Optional Yale keyways available upon request, extended lead times may apply.

Options:

Cylinders available 0-bitted, keyed alike, master keyed or construction master keyed upon request. Cylinders provided in 605 and 626 finishes only.

LEVERS/KNOBS ACCEPTING SMALL FORMAT INTERCHANGEABLE CORES

Cylinder Type	Prefix	Ordering Example
SFIC (Accepts all Small Format Interchangeable Cores) 6- or 7-pin.	В (i.e. B-AU, B-MO, B-PB, B-CA)	B-PB-4607LN x 626

OTHER MANUFACTURERS KEYWAY CYLINDERS/CORES

Illustration	Туре	Model Number	Number of Pins
(Sale)	Best® Keyway Core. Available keyed random, master keyed or uncombinated. Specify keyway A, B, C, D, E, F, G, H, J, K, L or M.	A600	6 or 7 (Specify)
	Schlage [®] C Keyway Knob Cylinder. Available 0-bitted or keyed random.	2805 x C	6
	Schlage® C Keyway Lever Cylinder. Available 0-bitted or keyed random.	2806 x C	6
	Corbin Russwin L4 Keyway Cylinder. Available keyed random.	3806 x L4	6
	Corbin 60 Keyway Cylinder. Available keyed random.	3806 x 60	6
	Russwin D1 Keyway Cylinder. Available keyed random.	3806 x D1	6
	Sargent [®] LA Keyway Cylinder. Available keyed random.	3806 x LA	6
	Schlage® E Keyway Cylinder. Available keyed random.	3806 x E	6


Note: 2805, 2806 and 3806 cylinders are supplied with applicable tailpieces that are needed to operate 4600(LN) locksets. These cylinders are not ANSI/BHMA certified.



Latchbolts

PLAIN LATCHBOLTS

Model No. MCP234 supplied standard with all 4600(LN) series locksets without locking function. Model No. MCP234 latchbolt has a 2-1/4" x 1-1/8" front with a 2-3/4" backset and a 1/2" bolt throw. Optional latchbolts available to special order.




Model Number	Front	Backset	Throw	"W" Front Width	Latch Diameter*
MCP238	Square	2-3/8" (60mm)	1/2" (13mm)	1" (25mm)	7/8" (22mm)
MCP238R	Round	2-3/8" (60mm)	1/2" (13mm)	1" (25mm)	7/8" (22mm)
MCP234	Square	2-3/4" (70mm)	1/2" (13mm)	1-1/8" (29mm)	7/8" (22mm)

^{*1/8&}quot; sleeve (P/N 14-0378-9001) supplied with all latchbolts to accommodate 1" preps.

DEADLOCKING LATCHBOLTS

Model No. MCD234 supplied standard with all 4600(LN) series locksets with locking function. Model No. MCD234 latchbolt has a 2-1/4" x 1-1/8" front with a 2-3/4" backset and a 1/2" bolt throw. Optional latchbolts available to special order.



Model Number	Front	Backset	Throw	"W" Front Width	Latch Diameter*
MCD238	Square	2-3/8" (60mm)	1/2" (13mm)	1" (25mm)	7/8" (22mm)
MCD238R	Round	2-3/8" (60mm)	1/2" (13mm)	1" (25mm)	7/8" (22mm)
MCD234	Square	2-3/4" (70mm)	1/2" (13mm)	1-1/8" (29mm)	7/8" (22mm)


^{*1/8&}quot; sleeve (P/N 14-0378-9001) supplied with all latchbolts to accommodate 1" preps.

Note: Locksets ordered with 2-3/8" backset square or round latchbolts will automatically include the corresponding 70S or 71S full lip strike as standard. Order must specify if alternate strike required.




Strikes

Yale® 4600(LN) locks are available with a variety of strike options. All strikes are located on the same vertical and horizontal center lines as the latchbolt. Some strikes are available in a variety of lip lengths to accommodate varying thickness of doors and frames. To determine the proper length of the lip, measure from the center line of the strike to the edge of the jamb, accounting for any interfering trim (i.e. wood molding) and then add 1/4" (6mm) for curved lip. All strikes are reversible. Strikes are fabricated of either brass, bronze or stainless steel, depending on the lockset trim finish. When ordering strikes separately, specify the finish required.




Model No. 371 T-Strike (Standard for Knob -Optional for Lever)

2-3/4" x 1-1/8" x 1-1/4" (70mm x 29mm x 32mm) lip to center supplied standard for knob. 1", 1-1/2", 1-3/4" and 2" curved lip lengths available by special order. Wrought strike box supplied.




Model No. 497 ANSI Strike (Standard for Lever -Optional for Knob)

For door and frames with ANSI/BHMA A156.115 preparations. 4-7/8" x 1-1/4" x 1-1/4" (124mm x 32mm x 32mm) lip to center supplied standard for lever. 1-1/8", 1-1/2", and 1-3/4" lip lengths available by special order. Available with optional 202 Strike Box. Specify 497 x 202.




Model No. 70S Full Lip Strike (Optional for Knob or Lever)

2-1/4" x 1-3/4" x 1-1/4" (57mm x 44mm x 32mm) lip to center with full lip anti-rattle tab.



Model No. 71S Full Lip Strike (Optional for Knob or Lever)

1/4" radius. Similar in dimensions and function to the 70S Strike but with radius corners for easy mortising by power tools. Anti-rattle tab.



Model No. 202 Strike Box Available to special order. Specify 497 x 202.

ATTACHING SCREWS

For Model Nos. 371, 70S, and 71S

 $\#8-32 \times 3/4$ " (19mm) Phillips flat head combination wood and machine screws.

For Model No. 497

 $\#12-24 \times 1"$ Phillips flat head combination wood and machine screws.

Contact Us

The world's favorite lock



U.S.A.

Yale Locks & Hardware

Address: 225 Episcopal Road Berlin, CT 06037-4004 Tel: 1-800-438-1951 Fax: 1-800-338-0965 yalelocks.com Canada: ASSA ABLOY Door Security Solutions Canada

Address: 160 Four Valley Drive Vaughan, Ontario L4K 4T9 Tel: 1-800-461-3007 Fax: 1-800-461-8989 assaabloydss.ca International: ASSA ABLOY Americas International

Tel: 1-905-821-7775 Fax: 1-905-821-1429 assaabloyai.com

Yale Commercial is a business associated with ASSA ABLOY Access and Egress Hardware Group, Inc., an ASSA ABLOY Group company. Copyright © 2010-2018, ASSA ABLOY Access and Egress Hardware Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Access and Egress Hardware Group, Inc. is prohibited. Patent pending and/or patent www.assaabloydss.com/patents.

YALE, with its unique global reach and range of products, is the world's favorite lock.

ASSA ABLOY is the global leader in door opening solutions, dedicated to satisfying end-user needs for security, safety and convenience.

42701-11/18